

TOM	GMM	SNDC	SMS
LLC			
RLC			
MAC			
Physical Link / Layer 1			

Fig.1

Address Field (1 octet)
Control Field (variable length, max. 36 octets)
Information Field (variable length, max. 140-1520 octets)
Frame Check Sequence (FCS) Field (3 octets)

Fig.2

1/4




Fig.4

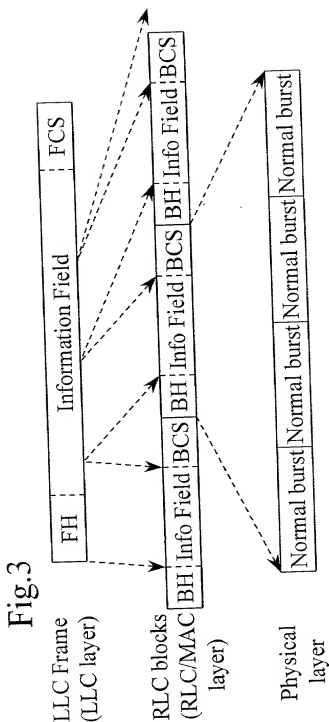


Fig.3

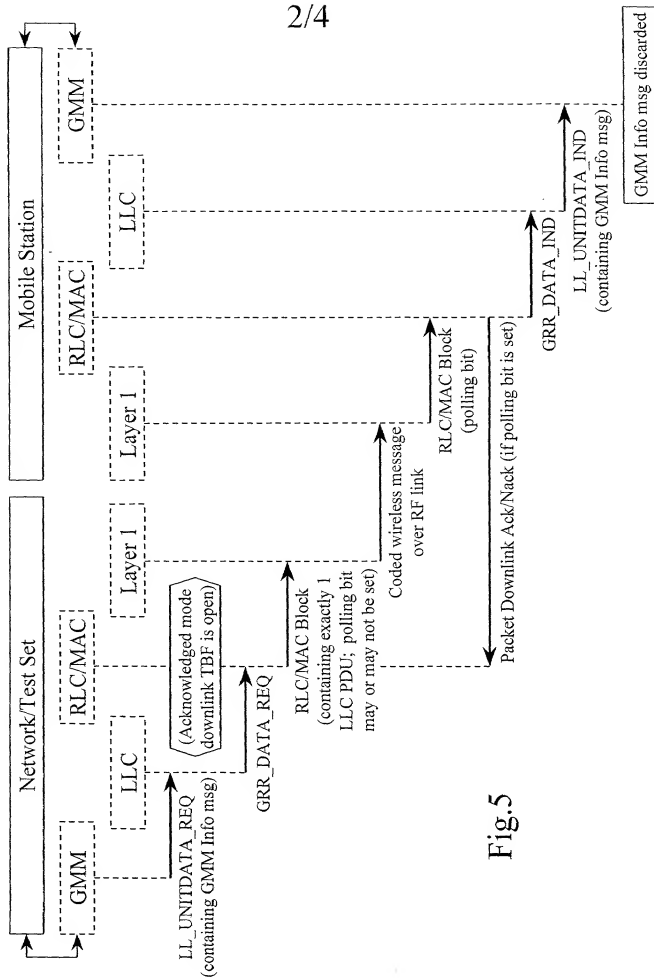


Fig.5


GMM Info msg

GMM Information Message, containing 2 octets:
Protocol Discriminator, Skip Indicator, GMM Info
Msg Identity. All other (optional) parts omitted.

gmm_block

Sent to LLC as LL_UNITDATA_REQ

LLC Frame



llc_block

Sent to RLC/MAC as GRR_DATA_REQ

RLC Block



Sent to Layer 1 for channel coding and
transmission

Fig.6

LLC Frame



llc_block

Sent to RLC/MAC as GRR_DATA_REQ

RLC Block


Sent to Layer 1 for channel coding and
transmission

Fig.8

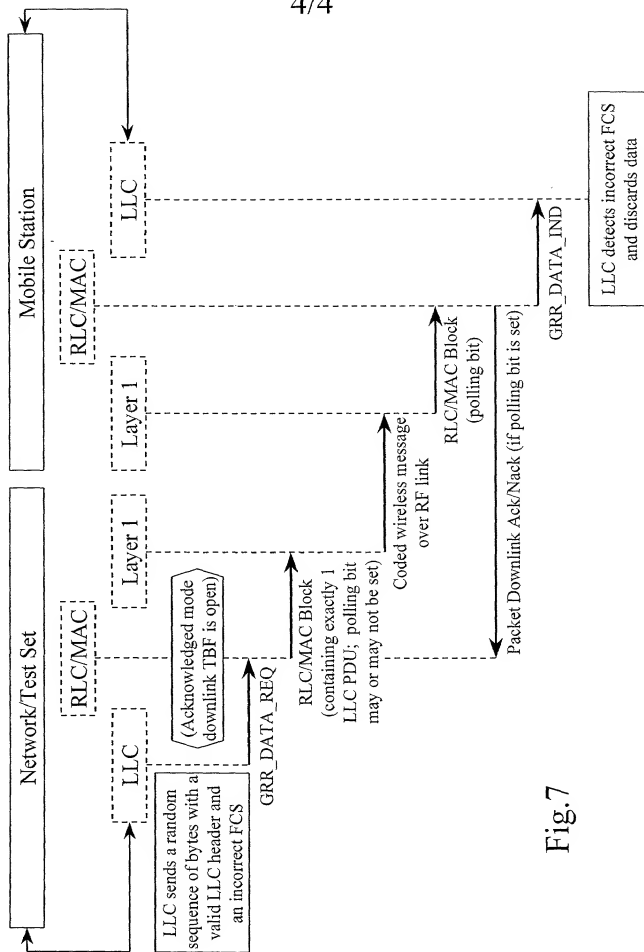


Fig.7